



ADUROS
SMART
ERIA®


USER MANUAL DIMMER




1. Switch off the main power.




2. Ceiling Installation:
Remove the existing lighting:
Detach the existing lighting
and disconnect the wires.
Do not exceed the maximum
load of 300W.




3. Connect the live and
neutral wire to [IN]
connect the live wire to
the right [L] terminal.
Connect the neutral wire
to the right [N] terminal.
Tighten the clamping
screws.



4. Connect 2 wires to "out"
2 wires to the inner [L]
and [N] contact.
Tighten the clamping
screws.

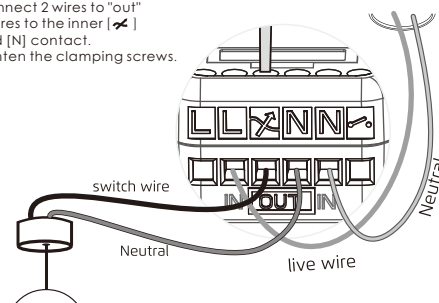


5. Wall installation
Remove the existing wall switch.
This receiver is a replacement for
the existing wall switch and it is
not suitable if the existing light
switch is interconnected to the
other light switches for multi
way switching.
Do not exceed
the maximum
load: 300W.

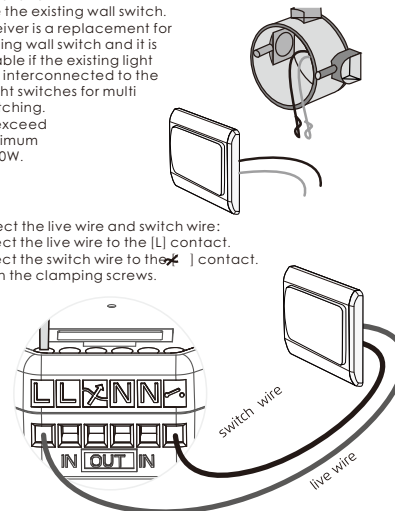


6. Connect the live wire and switch wire:
Connect the live wire to the [L] contact.
Connect the switch wire to the [X] contact.
Tighten the clamping
screws.


7. If the light is controlled by the live wire and the neutral wire:
Connect the live wire to the left [L] contact.
Connect the neutral wire to the
left [N] or right [N] connect the
switch wire to the [X].

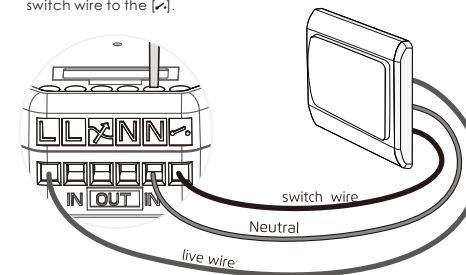


8. Switch on the main power
(electric meter box) to continue
the installation shock hazard!
Do not touch any exposed wiring.
Only touch the plastic housing or
this product.



9. Add your Dimmer to the AduroSmart ERIA Hub:
Open the AduroSmart ERIA app. Tap on "Settings", then "Devices".
On the top right corner tap on the "+" symbol. Select "Lights"
Afterwards, follow the instructions on your screen.

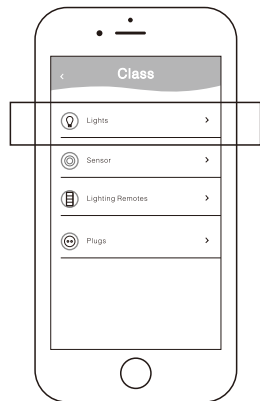


10. Set the device into pairing mode by following below instructions:




To set the device into pairing
mode use the pin to press the
button for 2 seconds.
The device will then go
into pairing mode.


11. Press on search in your AduroSmart APP
When the device is successfully paired, the LED indicator will
flash green and the device can be seen in the AduroSmart
ERIA app.

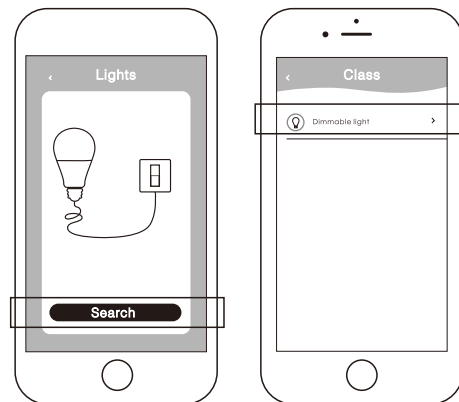

12. To reset to factory default settings use the pin to press the
button for 5 seconds.



13. If the dimming effect is not satisfactory press the button
for 25 seconds to switch from trailing edge to leading edge.
When the switch has been made, the LED indicator will flash
once to indicate the dimmer is set to leading edge or twice
for trailing edge.



www.adurosmart.com/manuals/dimmer